

## Right Choice

### High Quality:

Only use qualified high quality material, 5 years warranty for panels.

### Competitive Price:

Due to quantity mass production, unit price is very competitive, moreover, no any other maintenance cost caused by wrong choice (bad quality, no reliability, failure, etc.)

### Reliable:

Already approved by so many customers and projects, you take no risk.

### Free Service:

Dialux design, Lux calculation, Luminaire layout, Lamp qty calculation...etc.

### Technical Support:

Project consultant, Photometric data, New/special model development.

### OEM/ODM Capability:

Doing OEM/ODM for lots of world famous lighting brands.

# SHEENLY®

## 盛丽办公照明精选 OFFICE LIGHTING SELECTION 2016/2017

Make Soft Light and Clear Your  
Office Function.

connect with 'Sheenly lighting'



# SHEENLY®

Sheenly Lighting Co., Ltd.  
上海盛丽光电科技有限公司  
www.sheenly.com  
Tel: +86-21-6411-3138  
Fax: +86-21-6411-3862  
sales@sheenly.com


### Distributors in EMEA, Oceania, Asia

<b>PRIMA Lighting</b>	<b>Prima Lighting</b> A: Dieselweg 1, 3731 LB Bundeboon, The Netherlands T: +31 33 299 6181 F: +31 33 299 6131 E: info@primalighting.nl
<b>QLEDs</b>	<b>Quality LEDs</b> A: Nijverheidsstraat 18, 2070 DUFFEL, BELGIUM T: +32 15631339 F: +32 477 52 07 42 E: info@qleds.be
<b>ACEC</b>	<b>ACEC Distributors Ltd.</b> A: Unit 2B Kylemore Industrial Estate, Killeen Road, Dublin 16, Ireland T: +353-1-616 0000 F: +353-1-616 0500 E: info@acec.ie
<b>Elio Green Power Italia</b>	<b>Elio Green Power Italia (s)</b> A: Via A. Moro 5320097 San Donato Milanese (MI), Italy T: +39 028718720 F: info@vendita-led.it
<b>NORDESIGN</b>	<b>Nordesign</b> A: Nordesign AS, Granasveien 7, 7048 Trondheim, Norway T: +47 73 84 95 50 F: +47 73 91 40 00 E: norddesign@nordesign.no
<b>SWISS LED</b>	<b>Swiss Led Dmcc</b> A: Jumeirah Business Center (JBC) 3, Cluster Y, Jumeirah Lake Towers (JLT), Dubai, UAE T: +27 10 020 2023 E: info@swiss-led.com
<b>LUMITRON</b>	<b>Lumitron Pte Ltd</b> A: 103 Kaki Bukit Avenue 1, Shun Li Industrial Park, 415968, Singapore T: +65-6846 2288 F: +65-6846 2289 E: dong@lumitron.com.sg
<b>Ecolight</b>	<b>Elektros taupymo sprendimai, UAB</b> A: P. Luksio str. 1 Vilnius 08221, Lithuania Liepu str. 15, 53290 Linksmakalnis, Kaunas distr., Lithuania T: +370 5 2328207 E: info@ecolight.lt
<b>Wisteria Lighting</b>	<b>Wisteria Lighting</b> A: Head Office: 4/II, SB-09, Sector ZA, Gulshan-e-Maymar, Karachi, 75340, Pakistan. T: +92 21 36410046 E: info@wisteriagroup.com
<b>Lightmakers</b>	<b>Light Makers Ltd</b> A: 46 Gavin Street, PO Box 11 206, Ellerslie 1542 Auckland, New Zealand T: +64 9 525 1229 E: sales@lightmakers.co.nz
<b>Distributors in North America</b>	
<b>US GREEN LIGHTING</b>	<b>CA, USA: US Green Lighting</b> A: 6301 Orangethorpe Ave., Buena Park, CA 90620, USA T: +1-800-743-0809 F: +1-800-743-0809 E: info@usgln.com
<b>ENER-SAVE</b>	<b>BC, Canada: Ener-Save Lighting</b> A: P.O. Box 84556 101 - 12080 Nordel Way Surrey, BC, V3W 6Y7, Canada T: +1-778-233-3905 T.F: +1-778-590-5000 E: sales@ener-savelighting.com
<b>ETLIN-DANIELS</b>	<b>Etlin-Daniels/Electrical Devices Inc.</b> A: 1850 Wilson Avenue, Toronto, Ontario, M9M 1A1, Canada T: +1-416-741-7336 T.F: +1-800-661-9610 F: +1-416-741-9104 E: sales@etlin.com
<b>IMPELSA</b>	<b>Guatemala: Impelsa</b> A: 4a. Calle 1-15 zona 10, c.a. 01010, Guatemala T: +502 2312 1400 F: +502 2312 1400 E: mrhoesa@impelsa.com
<b>Terrasol</b>	<b>Finland: Terrasol Trading Oy Ltd</b> A: Sörkantie 81, 32270 Loimaa, Finland T: +358 400 919 560 E: terrasoltrading@terrasoltrading.org

REV. V1.1 2016/09/13

- ECO
- PRO
- CTA
- Slimo
- X-Plane
- R4 R6 R8
- R380
- R580

V1.1



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/qpl](http://www.designlights.org/qpl).

# LED 平板灯 LED PANEL LIGHT

Different design approaches ECO 90LM/W; PRO 110LM/W  
Excellent price to performance ratio  
SDCM < 4, superb color consistency  
Patented UGR 19 design \*optional  
Slim bezel design  
Attractive surface treatment  
ENEC, CE, ETL, DLC listed  
5 Years Guarantee

独有棱镜扩散板设计,  
特别光分布曲线,  
确保眩光值低于19。

5 YEAR GUARANTEE

50000 HOURS

DIMMABLE

110 lm/W

UGR19



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/qpl](http://www.designlights.org/qpl)

## Luminous Intensity Distribution Diagram & Illumination Diagram

配光曲线和照度图



Installation 安装方式  
More fixtures are available




## 经济型平板灯 & 高光效平板灯 ECO PANEL & PRO PANEL

- Power Factor: >0.95
- CRI: >80 (>70 optional)
- Beam: ECO 120°  
PRO 120°/100° UGR Optional

产品型号 Part Number	光通量 Lumens	产品尺寸 Dimension [mm]
<b>ECO</b>		
SL-PAN-20W-XW-AN-S2	1400-1800	295x295x10
SL-PAN-26W-XW-BN-S2	2000-2200	295x595x10
SL-PAN-35W-XW-AN-S2	3000-3200	595x595x10
SL-PAN-40W-XW-AN-S2	3400-3600	595x595x10
SL-PAN-50W-XW-AN-S2	4000-4500	595x595x10
SL-PAN-35W-XW-LS-S2	3000-3200	622x622x10
SL-PAN-40W-XW-LS-S2	3400-3600	622x622x10
SL-PAN-50W-XW-LS-S2	4000-4500	622x622x10
SL-PAN-45W-XW-AN-S2	3600-4000	295x1195x10
SL-PAN-45W-XW-BN-S2	3600-4000	595x1195x10
SL-PAN-70W-XW-BN-S2	5800-6200	595x1195x10
<b>PRO</b>		
SL-PAN-35W-XW-AN2	3200-3800	595x595x10
SL-PAN-40W-XW-AN2	3800-4400	595x595x10
SL-PAN-50W-XW-AN2	4800-5500	595x595x10
SL-PAN-35W-XW-LS2	3200-3800	622x622x10
SL-PAN-40W-XW-LS2	3800-4400	622x622x10
SL-PAN-50W-XW-LS2	4800-5500	622x622x10
SL-PAN-45W-XW-AN2	3800-4500	295x1195x10
SL-PAN-45W-XW-BN2	3800-4500	595x595x10
SL-PAN-70W-XW-BN2	6000-6500	595x1195x10
SL-PAN-50W-XW-LN2	4000-4500	295x1195x10

XW: WW 3000K /NW 4000K /PW 5700K



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/qpl](http://www.designlights.org/qpl).

For 5 years Over 1,000,000 pcs SALES

- No Compromise for quality
- No Batch defects
- No Tricks
- No Cheating
- Extremely low defect rate
- Extremely high reliability





Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/qpl](http://www.designlights.org/qpl).

## 智能调光调色平板灯

# SMART CTA LED PANEL LIGHT

Color temperature adjustable: 3000K to 6000K

An innovative product for Office Lighting, which adopts intelligent control system to dim the Brightness and adjust Color Temperature of LED panels via Blue-tooth.


Color temperature can be adjusted from 3000K to 6000K by remote controller as well as Smart Phone APP. In the meanwhile, the GROUP function ensures you to add different lights to different groups and control them separately and synchronously.



*Dimming with remote control or phone app,  
Bluetooth: up to 50 meters away, multiple luminaires,  
multiple groups*

遥控器或手机App控制调光,  
使用蓝牙技术: 控制距离大于50米, 多种灯具分组控制。

	产品型号 Part Number	功率 Power	色温 CCT	光通量 Lumens	发光角度 Beam	产品尺寸 Dimension Inches [mm]
CTA	SL-PAN-20W-BW-AN2	20W	CTA 3000K to 6000K	2000	120°/100° UGR Optional	295 x295 x10
	SL-PAN-40W-BW-AN2	40W	CTA 3000K to 6000K	4000	120°/100° UGR Optional	595 x595 x10
	SL-PAN-40W-BW-LS2	40W	CTA 3000K to 6000K	4000	120°/100° UGR Optional	622 x622 x10
	SL-PAN-40W-BW-BN2	40W	CTA 3000K to 6000K	4000	120°/100° UGR Optional	295 x1195 x10
	SL-PAN-40W-BW-LN2	40W	CTA 3000K to 6000K	4000	120°/100° UGR Optional	595 x1195 x10

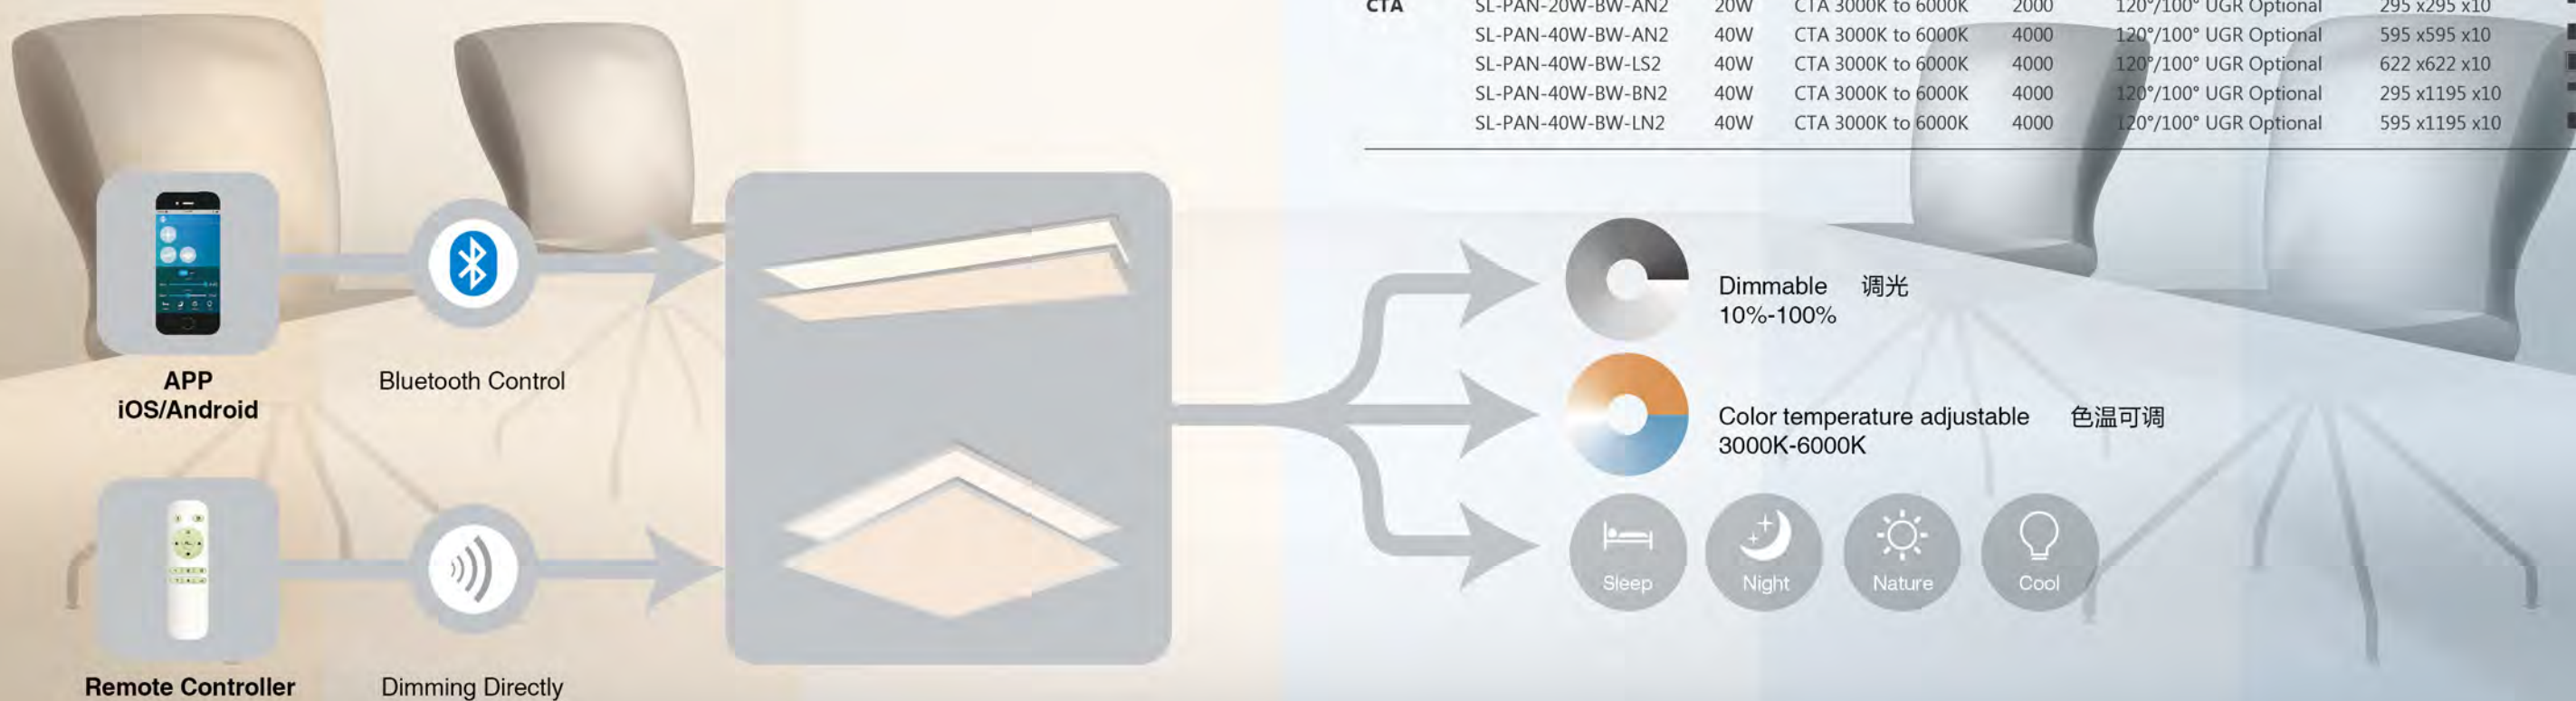

# Micro prismatic diffuser for UGR < 19

UGR - Unified Glare Rating  
统一眩光值小于19



*Sheenly specially designed*  
Micro prismatic diffuser ensures **UGR19** of light distribution

独有棱镜扩散板设计，特别光分布曲线，确保眩光值低于19。




**Why we choose Glare-free lights?**

- Luminaires without glare control will effect fatigue and loss of concentration
- Ensure Safety & Boost Productivity on your office

专利设计 UGR < 19 扩散板  
Patented UGR < 19 Micro Prismatic Diffuser  
Luminance < 3000cd/m<sup>2</sup> @ gamma 65°  
Fully compliance to EN 12464-1

统一眩光值受多方关注：  
*is concerned by:*

- Standard Regulation (EN12464-1)  
(regulates the lighting of indoor workplaces)
- Design Guideline
- Rebate Requirement
- Lighting Performance
- End User Experience
- 欧盟标准室内工作场所照明规范 (EN12464-1)
- 节能需求
- 设计指南
- 终端用户体验

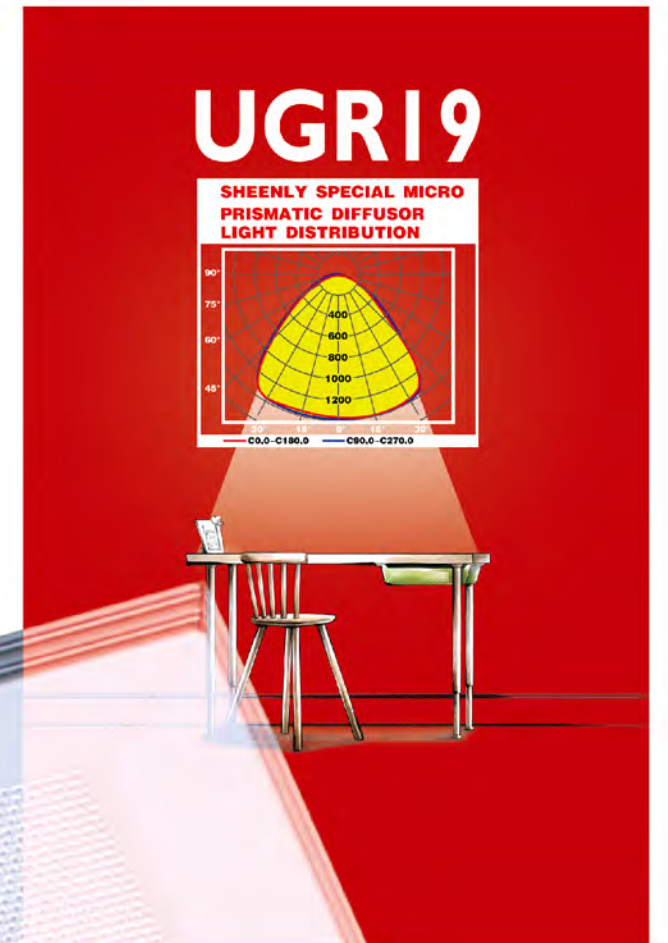

UGR19 Table


UGR (Unified Glare Rating) Table											
ceiling/cavity	70	70	50	50	30	70	70	50	50	30	
walls	50	30	50	30	30	50	30	50	30	30	
working plane	20	20	20	20	20	20	20	20	20	20	
Room dimensions X Y	Viewed crosswise					Viewed endwise					
2H	2H	15.1	16.3	15.4	16.5	16.7	15.5	16.7	15.8	16.9	17.2
	3H	15.9	17.0	16.2	17.3	17.5	16.3	17.3	16.6	17.6	17.9
	4H	16.3	17.3	16.6	17.6	17.9	16.6	17.6	17.0	17.9	18.2
	6H	16.7	17.6	17.0	17.9	18.2	17.0	18.0	17.4	18.3	18.6
	8H	16.8	17.7	17.2	18.0	18.4	17.2	18.1	17.6	18.4	18.7
12H	16.9	17.8	17.3	18.1	18.5	17.4	18.2	17.7	18.6	18.9	
4H	2H	15.5	16.5	15.8	16.8	17.0	15.8	16.8	16.2	17.1	17.4
	3H	16.5	17.3	16.8	17.7	18.0	16.8	17.7	17.2	18.0	18.3
	4H	17.0	17.8	17.4	18.1	18.5	17.3	18.1	17.7	18.4	18.8
	6H	17.5	18.2	18.0	18.6	19.0	17.8	18.5	18.2	18.9	19.3
	8H	17.8	18.4	18.2	18.8	19.2	18.1	18.7	18.5	19.1	19.5
12H	17.9	18.5	18.4	18.9	19.4	18.3	18.9	18.8	19.3	19.7	
8H	4H	17.2	17.9	17.7	18.3	18.7	17.5	18.1	17.9	18.5	18.9
	6H	18.0	18.5	18.4	18.9	19.4	18.2	18.7	18.6	19.1	19.6
	8H	18.3	18.8	18.8	19.2	19.7	18.5	19.0	19.0	19.4	19.9
	12H	18.6	19.0	19.1	19.5	20.0	18.8	19.3	19.3	19.7	20.2
	12H	18.4	18.9	18.9	19.3	19.8	18.6	19.0	19.1	19.5	20.0
Variations with the observer position at spacings:											
S =	1.0H	+0.3/	-0.4			+0.3/	-0.4				
	1.5H	+0.6/	-0.7			+0.5/	-0.7				
	2.0H	+1.1/	-1.1			+1.2/	-1.1				
Standard-table	BK05					BK04					
Correction summand	1.0					0.7					
Corrected 3447m Total Lamp Luminous											

UGR < 19 first whole column, for all room dimensions.

适用于所有室型的眩光控制。

# 玲珑上下发光平板灯 SLIMO TRANSPARENT PANEL LIGHT

Brand new design, Huge improvement  
Up/Down lighting 50%/50% - 30%/70% Optional  
Excellent surface treatment  
Robust structure, no BENT headache  
Transparent Optional

- Input Voltage: 100-277V/AC
- Power Factor: >0.95
- CRI: >80 


5 YEAR GUARANTEE - 5 YEAR GUARANTEE  
**5 YEAR GUARANTEE**

LONG LIFE & RELIABLE - LONG LIFE & RELIABLE  
**50000 HOURS**

Unified Glare Rating - Unified Glare Rating  
**UGR19**

产品型号 Part Number	功率 Power	色温 CCT	光通量 Lumens	发光角度 Beam	产品尺寸 Dimension Inches[mm]
SL-PAN-40W-XW-(U)SM	40W	3000K/4000K/5700K	3400lm	30% Up 70% Down	7.8"x47"x0.6"[198*1195*15]
SL-PAN-40W-XW-(U)SM-TP	40W	3000K/4000K/5700K	3400lm	50% Up 50% Down	7.8"x47"x0.6"[198*1195*15]
SL-PAN-40W-XW-(U)D	40W	3000K/4000K/5700K	3400lm	30% Up 70% Down	11.6"x47"x0.6"[295*1195*15]
SL-PAN-40W-XW-(U)D-TP	40W	3000K/4000K/5700K	3400lm	50% Up 50% Down	11.6"x47"x0.6"[295*1195*15]

XW: WW 3000K /NW 4000K /PW 5700K

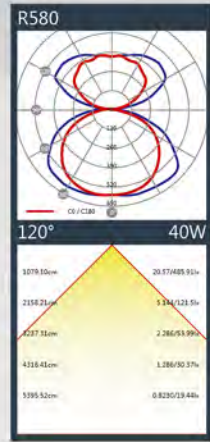

Create your personal light

- Completely Transparent 透明外观
- Excellent Surface Treatment 卓越的表面处理
- Ultra-modern and Stylish 现代感的设计

50% DOWNLIGHT



Unified Glare Rating - Unified Glare Rating  
**UGR19**

# LED 栅格灯

## LED X-PLANE LIGHT

Sheenly LED X-Plane Light adopts integrated design, and integral firm structure. Appearance with classical, stylish and lightweight.

Meanwhile, it used qualified super bright LED as light source, which is stable, long life and no UV & IR emission. Moreover, it creates extremely harmonious and uniform lights, which conventional light never achieved.

Anti-glare **UGR<19**, create a better lighting

防炫目设计, 营造舒适光环境

Built-in driver, easy installation of recessed or pendant  
IP54 (Room side), defend dust, defend ejected water

安装简单: 吊装或嵌入安装  
IP54表面防护灰尘, 防护喷水

**>0.95** POWER FACTOR  CRI>80



Part Number	功率 Power	色温 CCT	光通量 Lumens	发光角度 Beam	产品尺寸 Dimension Inches [mm]	
SL-TRO-28W-XW-EX	28W	3000K/4000K/5700K	3500	80°	595 x595 x 25	☒
SL-TRO-28W-XW-GX	28W	3000K/4000K/5700K	3500	80°	622 x622 x 25	☒
SL-TRO-40W-XW-EX	40W	3000K/4000K/5700K	5000	80°	595 x595 x 25	☒
SL-TRO-40W-XW-GX	40W	3000K/4000K/5700K	5000	80°	622 x622 x 25	☒

*Innovative Backlite Troffer, A stylish design in your ceiling*  
新型背发光格栅灯, 现代简约, 装点天花。



# LED 圆形平板灯 LED ROUND PANEL LIGHT

R4, R6, R8

Input Voltage 100-277 V/AC

CRI>80

Erp compatible



Part Number	功率 Power	色温 CCT	光通量 Lumens	发光角度 Beam	产品尺寸 Dimension Inches [mm]
SL-PAN-08W-WW-(UN)R4	8W	3000K/4000K/5700K	500	120°	145 x12 CutOut:125 ●
SL-PAN-08W-NW-(UN)R4	8W	3000K/4000K/5700K	650	120°	145 x12 CutOut:125 ●
SL-PAN-08W-DW-(UN)R4	8W	3000K/4000K/5700K	680	120°	145 x12 CutOut:125 ●
SL-PAN-15W-WW-(UN)R6	15W	3000K/4000K/5700K	1000	120°	180 x12 CutOut:160 ●
SL-PAN-15W-NW-(UN)R6	15W	3000K/4000K/5700K	1200	120°	180 x12 CutOut:160 ●
SL-PAN-15W-DW-(UN)R6	15W	3000K/4000K/5700K	1300	120°	180 x12 CutOut:160 ●
SL-PAN-24W-WW-(UN)R8	24W	3000K/4000K/5700K	1800	120°	240 x12 CutOut:220 ●
SL-PAN-24W-NW-(UN)R8	24W	3000K/4000K/5700K	2000	120°	240 x12 CutOut:220 ●
SL-PAN-24W-DW-(UN)R8	24W	3000K/4000K/5700K	2200	120°	240 x12 CutOut:220 ●

XW: WW 3000K /NW 4000K /DW 5000K /PW5700K

# R380 圆形平板灯 R380 ROUND PANEL LIGHT

Uniform light output

White/Black finishing available

Durable with life span over 50,000 hours

5 Years Guarantee



Surface mountde

Recessed

Suspension

表面安装

嵌入安装

悬吊安装

• Input Voltage: 100-277V/AC

• Power Factor: >0.95

• CRI: >80



产品型号 Part Number	功率 Power	色温 CCT	光通量 Lumens	发光角度 Beam	产品尺寸 Dimension Inches [mm]
SL-PAN-26W-XW-(U)/R40	26W	3000K/4000K/5000K/5700K	2600 lm	120°	D15.0"[D380*15 mm]


XW: WW 3000K /NW 4000K /DW 5000K /PW5700K



# R580 圆形平板灯

## R580 ROUND PANEL LIGHT

Suspension and Surface Mounted  
 Downlight & Transparent up/down optional  
 Uniform light output  
 White/Black finishing available  
 Durable with life span over 50,000 hours  
 5 Years Guarantee

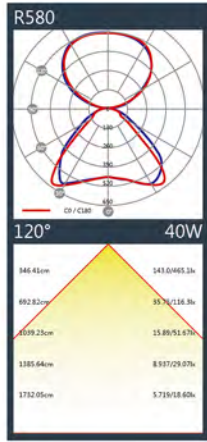

- Input Voltage: 100-277V/AC
- Power Factor: >0.95
- CRI: >80



5 YEAR GUARANTEE  
 50000 HOURS

Transparent Series




产品型号 Part Number	功率 Power	色温 CCT	光通量 Lumens	发光角度 Beam	产品尺寸 Dimension Inches [mm]
SL-PAN-40W-XW-(U)/R60	40W	3000K/4000K/5000K/5700K	3400 lm	120°	D22.8"[D580*15 mm]
SL-PAN-60W-XW-(U)/R60	60W	3000K/4000K/5000K/5700K	5000 lm	120°	D22.8"[D580*15 mm]
SL-PAN-40W-XW-(U)R60-UD-TP	40W	3000K/4000K/5000K/5700K	↑ 1700 ↓ 1700	Up/down	D22.8"[D580*15 mm]
SL-PAN-60W-XW-(U)R60-UD-TP	60W	3000K/4000K/5000K/5700K	↑ 2500 ↓ 2500	Up/down	D22.8"[D580*15 mm]



	产品型号 Part Number	功率 Power	色温 CCT	光通量 Lumens	发光角度 Beam	产品尺寸 Dimension Inches [mm]	
ECO	SL-PAN-20W-XW-AN-S2	20W	3000K/4000K/5700K	1400-1800	120°	295x295x10	■
	SL-PAN-26W-XW-BN-S2	26W	3000K/4000K/5700K	2000-2200	120°	295x595x10	■
	SL-PAN-35W-XW-AN-S2	35W	3000K/4000K/5700K	3000-3200	120°	595x595x10	■
	SL-PAN-40W-XW-AN-S2	40W	3000K/4000K/5700K	3400-3600	120°	595x595x10	■
	SL-PAN-50W-XW-AN-S2	50W	3000K/4000K/5700K	4000-4500	120°	595x595x10	■
	SL-PAN-35W-XW-LS-S2	35W	3000K/4000K/5700K	3000-3200	120°	622x622x10	■
	SL-PAN-40W-XW-LS-S2	40W	3000K/4000K/5700K	3400-3600	120°	622x622x10	■
	SL-PAN-50W-XW-LS-S2	50W	3000K/4000K/5700K	4000-4500	120°	622x622x10	■
	SL-PAN-45W-XW-AN-S2	45W	3000K/4000K/5700K	3600-4000	120°	295x1195x10	■
	SL-PAN-45W-XW-BN-S2	45W	3000K/4000K/5700K	3600-4000	120°	595x1195x10	■
SL-PAN-70W-XW-BN-S2	70W	3000K/4000K/5700K	5800-6200	120°	595x1195x10	■	
PRO	SL-PAN-35W-XW-AN2	35W	3000K/4000K/5700K	3200-3800	120°/100° UGR Optional	595x595x10	■
	SL-PAN-40W-XW-AN2	40W	3000K/4000K/5700K	3800-4400	120°/100° UGR Optional	595x595x10	■
	SL-PAN-50W-XW-AN2	50W	3000K/4000K/5700K	4800-5500	120°/100° UGR Optional	595x595x10	■
	SL-PAN-35W-XW-LS2	35W	3000K/4000K/5700K	3200-3800	120°/100° UGR Optional	622x622x10	■
	SL-PAN-40W-XW-LS2	40W	3000K/4000K/5700K	3800-4400	120°/100° UGR Optional	622x622x10	■
	SL-PAN-50W-XW-LS2	50W	3000K/4000K/5700K	4800-5500	120°/100° UGR Optional	622x622x10	■
	SL-PAN-45W-XW-AN2	45W	3000K/4000K/5700K	3800-4500	120°/100° UGR Optional	295x1195x10	■
	SL-PAN-45W-XW-BN2	45W	3000K/4000K/5700K	3800-4500	120°/100° UGR Optional	595x595x10	■
	SL-PAN-70W-XW-BN2	70W	3000K/4000K/5700K	6000-6500	120°/100° UGR Optional	595x1195x10	■
SL-PAN-50W-XW-LN2	50W	3000K/4000K/5700K	4000-4500	120°/100° UGR Optional	295x1195x10	■	
CTA	SL-PAN-20W-BW-AN2	20W	CTA 3000K to 6000K	2000	120°/100° UGR Optional	295 x295 x10	■
	SL-PAN-40W-BW-AN2	40W	CTA 3000K to 6000K	4000	120°/100° UGR Optional	595 x595 x10	■
	SL-PAN-40W-BW-LS2	40W	CTA 3000K to 6000K	4000	120°/100° UGR Optional	622 x622 x10	■
	SL-PAN-40W-BW-BN2	40W	CTA 3000K to 6000K	4000	120°/100° UGR Optional	295 x1195 x10	■
	SL-PAN-40W-BW-LN2	40W	CTA 3000K to 6000K	4000	120°/100° UGR Optional	595 x1195 x10	■
X-PANEL	SL-TRO-28W-XW-EX	28W	3000K/4000K/5700K	3500	80°	595 x595 x 25	⊠
	SL-TRO-28W-XW-GX	28W	3000K/4000K/5700K	3500	80°	622 x622 x 25	⊠
	SL-TRO-40W-XW-EX	40W	3000K/4000K/5700K	5000	80°	595 x595 x 25	⊠
	SL-TRO-40W-XW-GX	40W	3000K/4000K/5700K	5000	80°	622 x622 x 25	⊠
R4	SL-PAN-08W-XW-(UN)R4	8W	3000K/4000K/5700K	500-680	120°	145 x12 CutOut:125	●
R6	SL-PAN-15W-XW-(UN)R6	15W	3000K/4000K/5700K	1000-1300	120°	180 x12 CutOut:160	●
R8	SL-PAN-24W-XW-(UN)R8	24W	3000K/4000K/5700K	1800-2200	120°	240 x12 CutOut:220	●
R380	SL-PAN-26W-XW-(U)R40	26W	3000K/4000K/5000K/5700K	2600	120°	D580x15	●
R580	SL-PAN-40W-XW-(U)R60	40W	3000K/4000K/5000K/5700K	3400	120°	D580x15	●
	SL-PAN-60W-XW-(U)R60	60W	3000K/4000K/5000K/5700K	5000	120°	D580x15	●
	SL-PAN-40W-XW-(U)R60-UD-TP	40W	3000K/4000K/5000K/5700K	3400	Up/Down	D580x15	●
	SL-PAN-60W-XW-(U)R60-UD-TP	60W	3000K/4000K/5000K/5700K	5000	Up/Down	D580x15	●
	Slimo	SL-PAN-40W-XW-(U)SM	40W	3000K/4000K/5000K/5700K	3400	Up/Down	1150x198x18

XW: WW 3000K / NW 4000K / DW5000K / PW 5700K

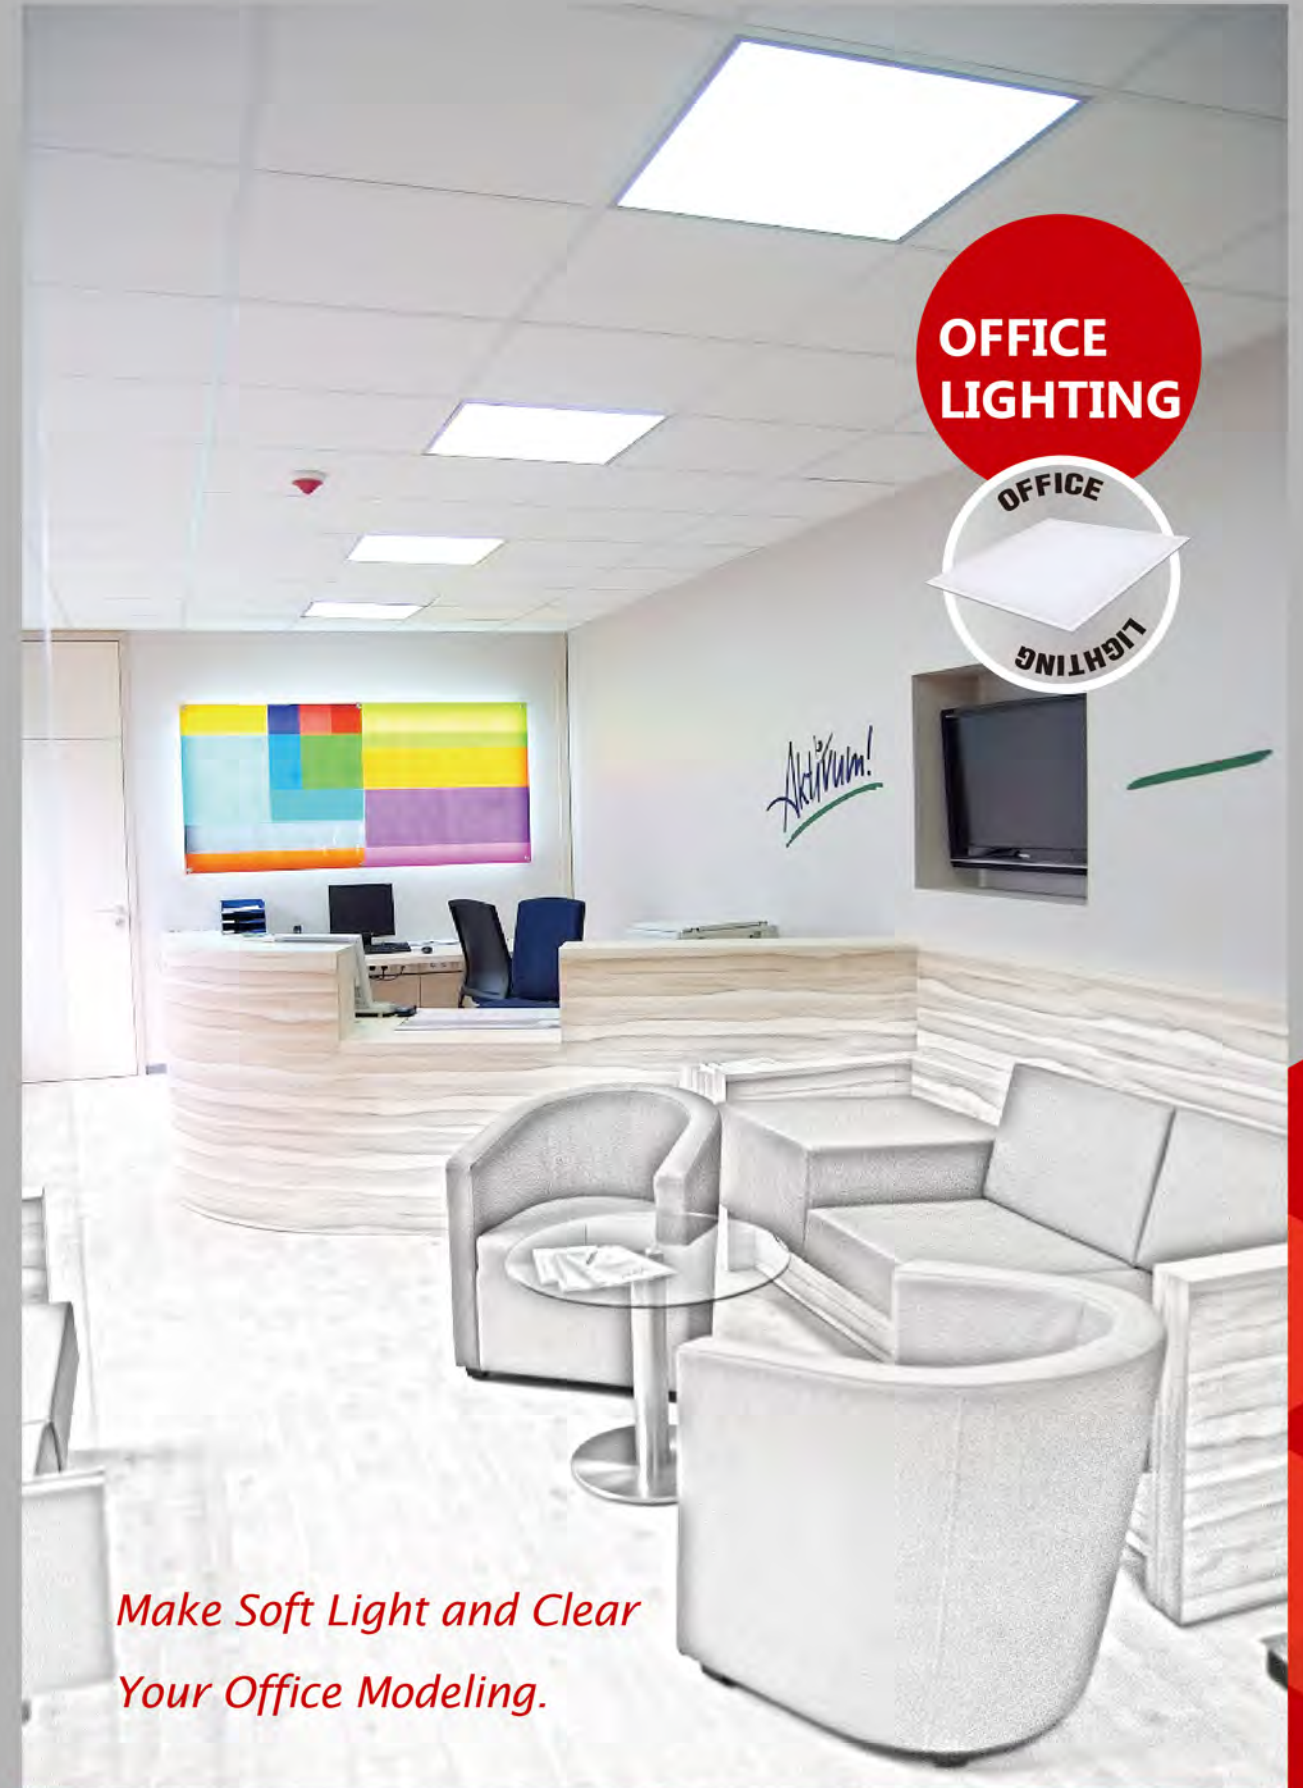

**OFFICE LIGHTING**



*Make Soft Light and Clear  
Your Office Modeling.*