


# Pan-tilt Dome Network Camera



## RYK-IPPD220(W)

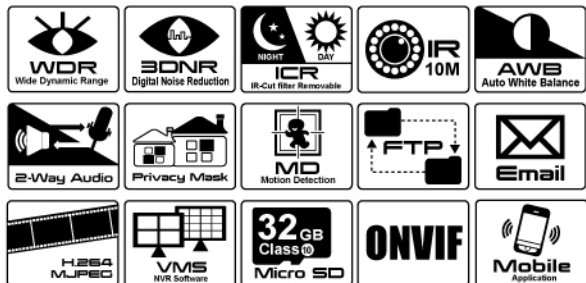

### Features

- High Sensitivity Image Sensor
- H.264 & M-JPEG Compression
- IR Distance 10M
- Wide Dynamic Range (WDR)
- Triple Streaming
- DC 12V / PoE AF
- WiFi Support (Option)
- Micro SD Card Slot
- Support multi - direction movement:  
Pan : 200° / Tilt : 70°

### Dimensions

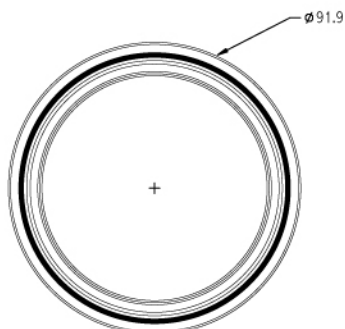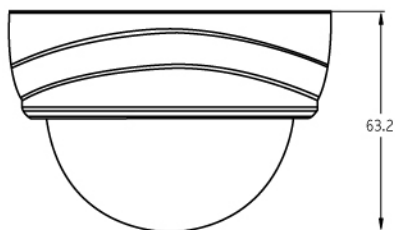

### Specifications

Model No.	RYK-IPPD220(W)
<b>IMAGE</b>	
Sensor	1/2.8" SONY "Exmor" CMOS
Resolution	2 Mega
Picture Elements	1920x1080
Frame Rates	30fps
Shutter Speed	Automatic, Manual (1/7.5 ~ 1/10000 Sec)
White Balance	Automatic, ATW, Outdoor, Indoor, Lamp
Minimum Illumination	0.2Lux @ F1.8 (Color), 0 Lux with IR
Gain Control	Auto, Manual (0~30db)
Back Light Comp.	Yes
WDR	Yes
DNR	3D Noise Filter
IR-Cut filter Removable	Yes
Day & Night	Auto/Manual
<b>LENS</b>	
Lens Drive Type	Board Lens f=3.6mm, F1.8
IR Illumination Distance	Max. 10M
<b>VIDEO</b>	
Video Compression	H.264 & M-JPEG
Video Streaming	3 Streaming
Flip & Mirror	Yes
Privacy Mask	3 Areas
Motion Detection	3 Areas
Tampering Alarm	1~10/s
<b>AUDIO</b>	
Audio In	Build-in Mic
<b>NETWORK</b>	
Ethernet	10/100 Base T Ethernet (RJ-45)
Protocol	HTTP, HTTPS, DHCP, PPPoE, DDNS, SMTP, FTP Server NTP, Bonjour
Password Protection	Yes
Live Viewing User	10
Wireless	802.11 b/g/n (Option)
<b>APPLICATION</b>	
Network Storage	VMS, SD Card Network Fail Recording, SD Card Schedule Recording
Live Viewing	IE, VMS, Mobile
<b>GENERAL</b>	
SD Card Slot	MicroSD, up to 32GB
Power Supply	DC 12V:PoE802.3 AF
Micro SD Slot	Yes(support Class 10 above)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
Integrate Document	CGI / SDK / Onvif
Dimensions (W x H x D)	Ø92 x 63 (mm)
Humidity	0% ~ 85% RH
Certificate	CE, FCC,BSMI