

MULTIMEDIA OVER COAX ADAPTER



MA 32 shop

Article number 695020533

PRODUCT CATEGORY: 41 IP@HOME
STATUS: AVAILABLE



Product

MULTIMEDIA OVER COAX ADAPTER
MA 32 shop

For the expansion of the present coax network with High Speed Ethernet up to 400 Mbps. The adapter can be used in combination with routers, gateways, ADSL- and cable modems. Supports UHD and 3D video, gaming and High Speed network. The MA 32 is plug & play connectable to the existing coax cable. MoCA 2.0 compliant, also downwards compatible with MoCA 1.1. Suited for Smart TV, Blu-ray™player, Xbox®, Playstation®, Apple TV®, DVR, NAS (network storage), desktop, VoIP, Video on Demand, laptop, etc. Manual included.



Properties

2 Year Warranty	High Durability	Digital & 3D ready
Plug & Play	High-speed internet	1 GHz Ready
MoCA 2.0 compliant	Quick install	LED Indication

Certificates

Included

- Coax cable 0.75 cm; IEC-male to F-male
- CAT 5E UTP cable RJ 45-RJ 45; 75 cm, color white
- Adapter IEC female to F male
- 230 VAC adapter

Tools

- 1 piece Cable stripper CST 5 shop
Article number 695004806



Instruction video

www.montagefilm.net

Instruction card

www.install-your-catv.net

Mechanical Specifications

Dimensions hxxwx
200 x 125 x 50 mm

Weight
0.475 kg

Colour
White

PRODUCTSHEET

MA 32 shop

MULTIMEDIA OVER COAX ADAPTER

Specifications

Mechanical specifications

Cable Input F-type, 75 Ohm
Loop through Output F-type, 75 Ohm
Gigabit-Ethernet port RJ 45
Dimensions 130x80x30 (mm),
Plastic housing

Electrical specifications

Low pass 5-1002 MHz
Insertion loss 1 dB Max.
Return loss 10 dB Min.
High pass 1125-1675 MHz
Insertion loss 3 dB Max.
Return loss 10 dB Min.

MoCA Band D(LOW) or D(EXTD)
Channel bandwidth 50/100 MHz for MoCA 2.0
Throughput (MAC Rate) Up to 400 Mbps

MoCA Link Indicator

Yellow: MoCA Link
Blinking Yellow: MoCA active
Green: 100 Mbps
Orange: 1000 Mbps

1000 / 100 Ethernet Indicator

Blue

Power Indicator Reset Button

(Hidden)
Press & hold 15 sec. at least to restore device back to default setting


Main input adaptor 100 – 240 VAC~, 50/60 Hz
DC output adaptor 12V@1A (or 5V@2A)
Power Consumption <4 W

Regulation/Certification

CE Compliant EMC / LVD
ROHS Compliant

- (1) SIGNAAL OVERNAME PUNT (S.O.P.) - DIO 01
- (2) CAI WANDCONTACTDOOS - EDC 1000
- (3) CAI VERSTERKER - HMV 41 shop
- (4) MULTIMEDIA OVER COAX ADAPTER - MA 32 shop
- (5) HDMI KABEL - HDMI HIGH SPEED MET ETHERNET - 1,8 m
- (6) AFLUITWEERSTAND - RF 75 (OPTIONEEL)
- (7) VERDEELEMMENT TWEEVOUDIG - DFC 2104

COAXKABEL 
ETHERNETKABEL 
HDMI KABEL 

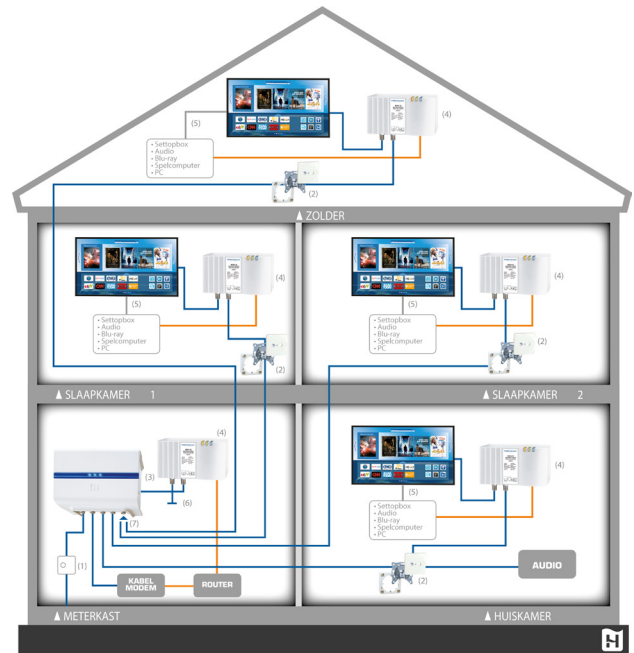

Related product -

KOKA 9 Eca/100 m white

Article number 298799801

www.hirschmann-multimedia.com/CPR



Related product -

QFC 5 shop

Article number 695021145



Related product -

HMV 41 shop

Article number 695004725



Contact

🏠 Pampuslaan 170
1382 JS WEESP

✉ info@hirschmann.nl

☎ NL 31 (0)294 46 25 55
BE 32 (0)2 46 13 095

🌐 www.linkedin.com/company/hirschmann-multimedia

📘 www.facebook.com/hirschmann.multimedia

📺 www.youtube.com/HirschmannMultimedia

Hirschmann Multimedia B.V.

Hirschmann Multimedia B.V. is an international knowledge company and manufacturer, located in Weesp - The Netherlands. Hirschmann Multimedia focusses on leading the market by being innovative, flexible and renewing.

Hirschmann Multimedia Products (HMP):

Serving the retail and installer market, Hirschmann Multimedia Products is expanding from The Netherlands and Belgium towards 16 other European countries as of 2014. Through a qualified and selected dealer and installer network, HMP provides in products for COAX, IP and satellite systems.