

SHEENLY LED PANEL LIGHT-PRO SERIES

Sheenly Ultra Slim LED Panel Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission. The anodized aluminum frame is stylish and fashionable with everlasting color. It is powered by low voltage constant current driver, which is safety, energy saving and long life.

Sheenly LED Panel light is the ideal replacement for traditional grid lights and fluorescent tubes. Moreover, Sheenly Panel light creates extremely harmonies and uniform lights, which conventional light never achieved.

FEATURES

- Demand of premium high quality standards
- Efficiency up to 95 lm/w, UGR<19
- CRI >80, ErP compatible
- Ultra slim design
- Different frame designs and colors are available
- Easy and various installation styles
- Dimmable compatible with Dali
- Lighting sensors and Motion sensors are optional
- Emergency battery pack last for 3 hours
- Customized size accepted
- 5 years guarantee for the panel
- 3 years guarantee for the driver



COVER

- PMMA
- Micro Prismatic and PC available
- Customized

APPLICATION

- Office Lighting
- Restaurants
- Bank
- School and Hospital
- Workshop

FRAME FINISHING



- Silver
- White
- Customized

CERTIFICATES

- ✓CE ✓RoHS ✓REACH ✓Erp
- ✓UL/cUL ✓Glow wire test 850°

Visit www.sheenly.com for more details

SPECIFICATIONS

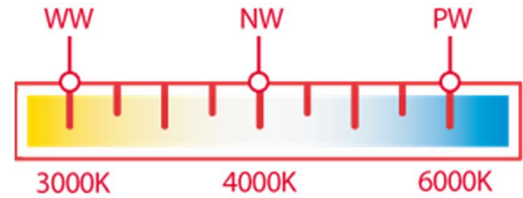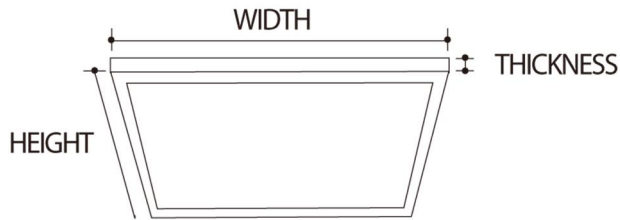

● 300x300mm Series

Part Number	Power (w)	CCT (K)	Lumen (lm \pm 10%)	LEDs (pcs)	Dimensions (HxWxT mm)	Weight (kg)
SL-PAN-20W-WW-AN/AS*	20	3000K	1120	160	295x295x12	1.2
SL-PAN-20W-NW-AN/AS*	20	4000K	1300	160	295x295x12	1.2
SL-PAN-20W-PW-AN/AS*	20	6000K	1460	160	295x295x12	1.2
SL-PAN-20W-BW*/-AN	20	3000K/6000K	1300	160	295x295x12	1.2

*AS, 320x320mm

*BW, Color Temperature: WW & PW

(320x320mm Optional)



● 300x600mm Series

Part Number	Power (w)	CCT (K)	Lumen (lm \pm 10%)	LEDs (pcs)	Dimensions (HxWxT mm)	Weight (kg)
SL-PAN-26W-WW-BN	20	3000K	2000	200	295x595x12	2.5
SL-PAN-26W-NW-BN	20	4000K	2100	200	295x595x12	2.5
SL-PAN-26W-PW-BN	20	6000K	2200	200	295x595x12	2.5

Visit www.sheenly.com for more details

- 600x600mm Series** (620x620mm Optional)

Part Number	Power (w)	CCT (K)	Lumen (lm +/-10%)	LEDs (pcs)	Dimensions (HxWxT mm)	Weight (kg)
SL-PAN-26W-WW-AN/LS*	26	3000K	2000	200	595x595x12	4.2
SL-PAN-26W-NW-AN/LS*	26	4000K	2100	200	595x595x12	4.2
SL-PAN-26W-PW-AN/LS*	26	6000K	2200	200	595x595x12	4.2
SL-PAN-40W-WW-AN/LS*	40	3000K	3200	320	595x595x12	4.4
SL-PAN-40W-NW-AN/LS*	40	4000K	3400	320	595x595x12	4.4
SL-PAN-40W-PW-AN/LS*	40	6000K	3600	320	595x595x12	4.4
SL-PAN-50W-WW-AN/LS*	50	3000K	4000	400	595x595x12	4.4
SL-PAN-50W-NW-AN/LS*	50	4000K	4200	400	595x595x12	4.4
SL-PAN-50W-PW-AN/LS*	50	6000K	4500	400	595x595x12	4.4
SL-PAN-50W-BW*-AN/LS*	50	3000K/6000K	4200	400	595x595x12	4.4

*LS,620x620mm

*BW, Color Temperature: WW & PW

- 300x1200mm Series**

Part Number	Power (w)	CCT (K)	Lumen (lm +/-10%)	LEDs (pcs)	Dimensions (HxWxT mm)	Weight (kg)
SL-PAN-45W-WW-AN	45	3000K	3000	320	295x1195x12	4.5
SL-PAN-45W-NW-AN	45	4000K	3200	320	295x1195x12	4.5
SL-PAN-45W-PW-AN	45	6000K	3400	320	295x1195x12	4.5

- 600x1200mm Series**

Part Number	Power (w)	CCT (K)	Lumen (lm +/-10%)	LEDs (pcs)	Dimensions (HxWxT mm)	Weight (kg)
SL-PAN-45W-WW-BN	45	3000K	3000	320	595x1195x12	10
SL-PAN-45W-NW-BN	45	4000K	3200	320	595x1195x12	10
SL-PAN-45W-PW-BN	45	6000K	3400	320	595x1195x12	10
SL-PAN-70W-WW-BN	70	3000K	4700	480	595x1195x12	10
SL-PAN-70W-NW-BN	70	4000K	5000	480	595x1195x12	10
SL-PAN-70W-PW-BN	70	6000K	5300	480	595x1195x12	10


Visit www.sheenly.com for more details

INSTALLATION

- Recessed



- Clip in

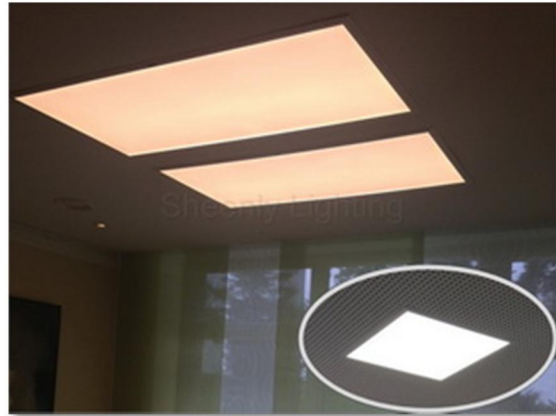


- Flush



- Surface Mounted



-Suspension

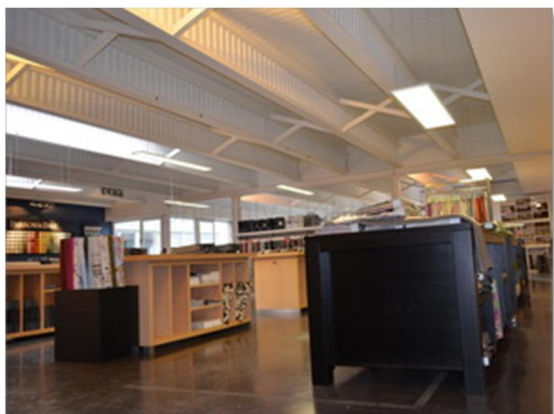

*All specifications subject to change without notice.

©2009-2014 Sheenly Lighting all rights reserved.

Visit www.sheenly.com for more details